
# ROADFORMS User Guide



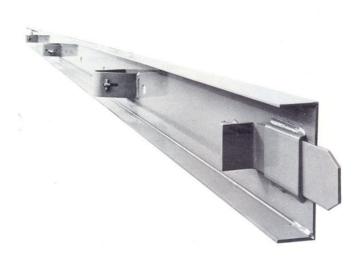

LW/10.22

## Roadforms

Roadforms are intended to be used as shuttering, typically forming concrete floor slabs.

#### **Identification of Components**

Generation UK Hire Roadforms can be identified from the diagrams below:

Rigid Roadforms			Profile (Round Edges)	Dimensions
Code	Depth (mm)	Weight (kg)		2000
410004	100	23.1	▲	3000
410006	150	29.5	Depth	
410008	200	35.6		
410009	250	42.7	★_L	
410010	300	50.0		

Flexable Roadforms			Profile (No Profiled Edges)	Dimensions
Code	Depth (mm)	Weight (kg)		
410014	100	16.2	<b>▲</b>	3000
410016	150	18.2	Depth	
410018	200	29.3		
410019	250	31.4	¥	- A A A A A
410020	300	46.0		

Roadform Stakes							
Code	Length (mm)	Weight (kg)					
410050	600	2.2					



Normal lengths supplied Other lengths available Typically 19mm diameter

## Usage

The equipment should not be used for purposes other than Roadforms. Generation UK Hire Roadforms may not be compatible with other items obtained from other suppliers. It is recommended that they should be stored and used separately.


# **Stacking and Handling**

## Roadforms

All Roadforms are supplied with a release agent to help protect against concrete contamination. It is recommended that protective gloves are worn when handling.

Generation UK Hire Roadforms should be stacked and banded for transportation and storage on site as shown below. They should be placed on suitable level section on the vehicle bed or on dry, level & firm ground.

Each pack should contain 30no Roadforms (5no wide x 6no high) unless they are 250mm deep - in which case they should be stacked in packs of 24 no (4no wide x 6no high).

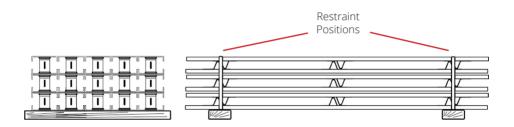

Individual packs may be stored directly on top of each other 3no packs high using suitable dunnage between the packs. During transportation, the Roadforms must be securely restrained to the vehicle bed. Restraints should be located at the end stake housing position to prevent bowing of the Roadforms, as shown above.

Unloading and slinging operations should be carried out by experienced and competent personnel using suitable plant and lifting equipment.

### **Roadform Stakes**

These are normally supplied in stillages, they should be returned to Generation Depots as delivered.



Groundworks Numbers: UK: **087 0870 8484** IRL: **00353 1 601 1500** 



Generation UK Ltd. Generation Head Office, Trinity Street, Off Tat Bank Road, Oldbury, West Midlands, 869 4LA - United Kingdom Tel. 0121 543 2950 - Fax. 0121 543 2953 - groundworks.enquires@altradgeneration.com www.altradgeneration.com

GENERATION HIRE & SALE

